


NOTES:

- a. NCDOT # 5 OR #57 WASHED STONE SHALL BE USED. PAD TO BE 50'L X 20'W X 6" D AT A MINIMUM.
- b. TURNING RADIUS SUFFICIENT TO ACCOMMODATE LARGE TRUCKS IS TO BE PROVIDED.
- c. ENTRANCE(S) SHOULD BE LOCATED TO PROVIDE FOR MAXIMUM UTILITY BY ALL CONSTRUCTION VEHICLES.
- d. MUST BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR DIRECT FLOW OF MUD ONTO STREETS. PERIODIC TOPDRESSING WITH STONE SHALL BE NECESSARY; KEEP SOME HANDY.
- e. ANY MATERIAL WHICH STILL MAKES IT ONTO THE ROAD MUST BE CLEANED UP IMMEDIATELY.



NOTES: APPLICABLE AT ALL POINTS OF INGRESS & EGRESS UNTIL SITE IS STABILIZED, FREQUENT CHECKS OF THE DEVICE AND TIMELY MAINTENANCE MUST BE PROVIDED.

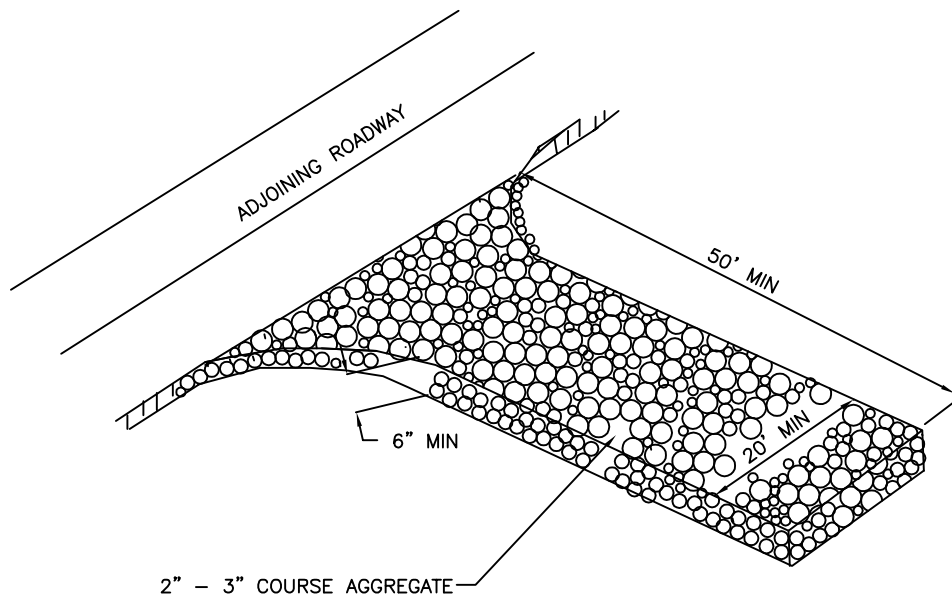

DATE 8/16/04	REVISED 8/18/04	SCALE NOT TO SCALE	DETAIL SE-5
-----------------	--------------------	-----------------------	----------------

TEMPORARY CONSTRUCTION ENTRANCE/EXIT
CITY OF BURLINGTON, NORTH CAROLINA
ENGINEERING DEPARTMENT